


TIME SWITCH WITH 72HRS SPRING RESERVE

DESIGN

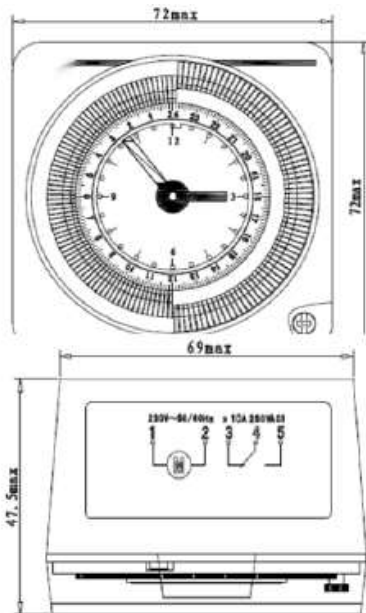

MODEL: NNE TS-181

Specifications:

Frequency	50-60 Hz
Number of channels	1
Width	4 modules
Installation type	Surface / flush panel / control panel
Type of connection	Screw terminals
Program	Daily program
Power reserve	72 hours
Shortest switching time	10 min
Programmable every	10 min
Number of switching segments	144
Time accuracy at 25 °C	$\leq \pm 2$ s/day(Quartz)
Type of contact	Changeover contact
Switching output	Potential-free and phase-independent
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Type of protection	IP 20
Ambient temperature	-10 °C ... +50 °C